

(12) UK Patent Application (19) GB (11) 2 169 927A

(43) Application published 23 Jul 1986

(21) Application No 8600166

(22) Date of filing 6 Jan 1986

(30) Priority data

(31) 3501944 (32) 22 Jan 1985 (33) DE

(71) Applicant

Sipra Patententwicklungs-und Beteiligungs-
gesellschaft mbH (FR Germany),
Emil-Meyer-Strasse 10, D-7470 Albstadt, 2-Tailfingen,
Federal Republic of Germany

(72) Inventors

Ernst-Dieter Plath,
Heinz Brunner

(74) Agent and/or address for service

Barlow Gillett & Percival, 94 Market Street, Manchester
M1 1PJ

(51) INT CL⁴

B65H 51/20

(52) Domestic classification (Edition H)

D1C 17

(56) Documents cited

GB A 2143856

GB 1465011

GB 1437499

GB 1417687

GB 1116486

(58) Field of search

D1C

D1E

D1J

Selected US specifications from IPC sub-class B65H

(54) A thread delivery device for textile machinery

(57) The thread delivery device is provided with a thread storage drum (17) which has, above a frustoconical thread run-in region (33), a shallow frustoconical thread run-on or reception region (32) and, beneath the thread run-in region (33), a cylindrical or slightly tapering thread storage region (34) which ends in a bead-free drum edge (35). A thread-feed guiding element (25) is so arranged that the thread (28) is always directed obliquely from above tangentially onto the thread run-on region (32), and a thread-draw-off guiding element (26) for tangential thread draw-off is so arranged that the thread (28) is lifted off from the thread storage drum (17) above the bead-free lower drum edge (35) at a shallow angle δ to the last thread coil (39). The guiding elements (25, 26) may be adjustable in height and yarn sensors may be provided adjacent the elements.

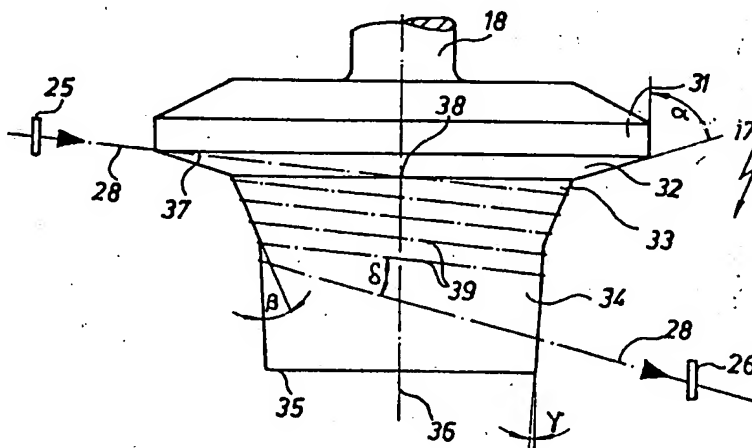


Fig. 2

GB 2 169 927 A

2/2

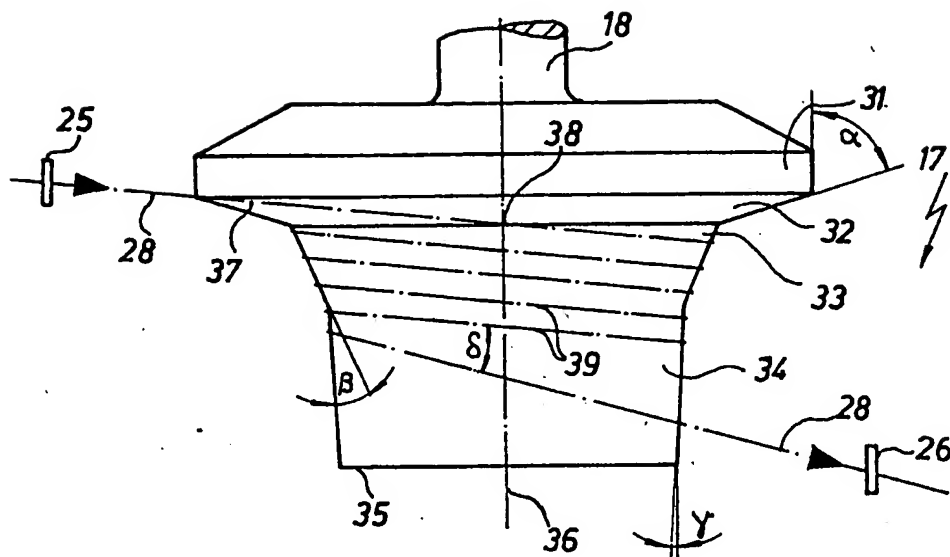


Fig. 2

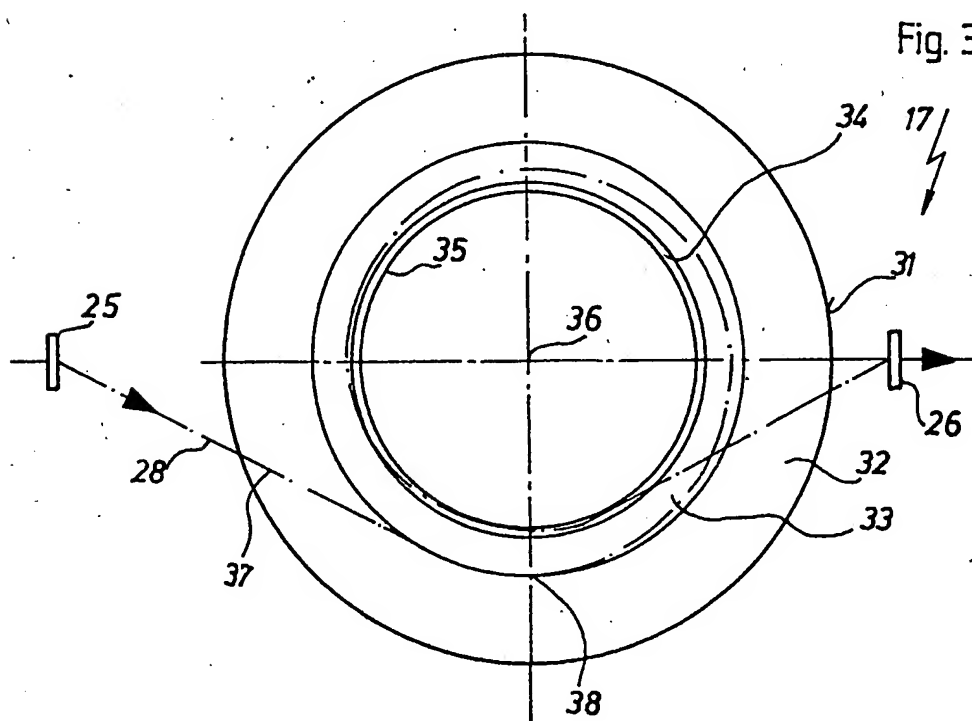


Fig. 3

SPECIFICATION

A thread delivery device for textile machinery

This invention relates to a thread delivery device
 5 for textile machinery comprising a drivable thread
 storage drum which is mounted rotatably on a
 substantially vertical axis and which has, in its upper
 part, a frustoconical thread run-in region and a
 cylindrical thread storage region linking
 10 downwardly thereto.

Thread delivery devices having the aforesaid
 thread storage drum features are known, for
 example, from German Patent Specification No.
 17 60 738.

15 On textile machinery, threads are processed
 which, by reason of different production material,
 such as for example cotton, wool, synthetic fibre
 material, or different processing and finish, for
 example smooth threads, twisted yarns, rippled
 20 threads or yarns, elastic threads, may have very
 different properties, which affect the functioning of
 thread delivery devices in different ways. In order to
 make allowance for these different thread
 properties, various storage drum profiles for thread
 25 delivery devices have been proposed. These are
 supposed to ensure that the thread is shifted on the
 thread storage drum in a single coil layer from a
 feed location to a draw-off location, without the
 thread coils overlapping one another and hindering
 30 an orderly draw-off of the thread from the storage
 drum.

The basic underlying object of the present
 invention is to design a thread delivery device which
 will ensure an orderly course of thread coils on the
 35 thread storage drum for all threads arriving at the
 device for processing.

More specifically, the object is to design the
 thread storage drum of the thread storage device in
 such a way that even yarns with a severe fibre
 40 abrasion are reliably guided and cannot cause any
 disturbance to the thread delivery device since it has
 been shown that, with close mutual abutment on
 the thread storage drum of the coils of yarns which
 have an extreme tendency to unravel or fray, severe
 45 fibre end interlacing can take place such that orderly
 thread draw-off from the storage drum is prevented.
 Moreover, in the case of such yarns, fibres
 becoming free on the thread storage drum form, at
 the lower drum edge (which is customarily provided
 50 with a bead for guidance of the thread and for
 protection against a falling-off of thread coils from
 the thread storage drum), a fibre ring into which the
 thread can work, which ring may act like a coarse
 braking ring and may lead to the tearing of the
 55 thread.

The object is achieved with a thread delivery
 device of the kind mentioned at the beginning
 her of, in accordance with the invention in that a
 shallower frustoconical thread run-on or reception
 60 region is formed above the frustoconical thread run-
 in region, in that the cylindrical thread storage
 region ends in a bead-free lower drum edge, in that
 a thread-free guiding element (25) is so arranged that
 the thread is brought obliquely from above and
 65 tangentially onto the thread run-on region, and in

that a thread draw-off guiding element enabling a
 tangential thread draw-off is so arranged that the
 thread is lifted off from the cylindrical thread
 storage region above the bead-free lower drum
 70 edge at a shallow angle to a plane determined by
 the lowermost complete thread coil.

Thus, in the case of the thread delivery device
 designed in accordance with the invention, the
 thread or the yarn is fed to the thread storage drum
 75 in such a way that it first touches the shallower
 frustoconical thread run-on or reception region. In
 so doing, as a result of this flat contact the thread or
 the yarn is calmed and immediately experiences a
 deflecting motion, unhindered by adhesive friction
 80 forces, in the axial direction causing it to run-up
 onto the connecting steeper frustoconical thread
 run-in region of the thread storage drum. The initial
 contact with the shallow frustoconical thread run-on
 region is, however, sufficient to impart to the
 85 arriving yarn a twisting motion about its
 longitudinal axis, which motion brings about
 consolidation of the yarn surface in the sense of
 better binding of protruding fibre ends. The effect of
 the thread run-up onto the thread run-in region
 90 being facilitated by the preceding shallow thread
 run-on region of the thread storage drum is that the
 thread coils proceed over the conical thread run-in
 region without noticeable lateral pressure on one
 another, and generally even without mutual contact,
 95 with the result that, even at the subsequent
 transitional point from the conical thread run-in
 region into the cylindrical thread storage region, the
 lateral pressure which the thread coils exert on one
 another on the cylindrical thread storage region
 100 remains within limits. This advantage can be further
 enhanced if the thread storage region of the thread
 storage drum is not exactly cylindrical, but is
 designed with a slight tapering towards the bead-
 free lower edge on the thread storage drum.

105 Fibres and fibre abrasion detritus which become
 free and collect on the outer surface of the drum can
 no longer collect at the bead-free lower drum edge.
 They either drop down over the lower drum edge or
 are pushed down. The danger of the formation of
 110 fibre rings into which the drawn-off thread can work
 is thus abolished.

With respect to the basic object of ensuring
 satisfactory functioning of the thread delivery
 device in the case of all possible kinds of yarn and
 thread and also with respect to the more specific
 115 object mentioned at the beginning hereof, it has
 turned out to be advantageous to select the conicity
 and length of the frustoconical thread run-in region
 in relation to the diameter of the subsequent
 120 cylindrical thread storage region of the storage
 drum in such a way that, upon run-off over the
 downwardly-tapering thread run-in region, the
 thread can experience a length shrinkage of 2% at
 the most. This means, in the case of yarns which
 125 have an extreme tendency to unravel and which
 have twisting motion about their longitudinal axis
 imparted to them by the initial shallow thread run-
 on region, that they can experience, during their
 course over the steeper conical thread run-in region,
 130 because of the decreasing coil diameter in the

thread run-in region, only a partial twisting back so that they pass with an adequate residual tension onto the cylindrical thread storage region. The residual tension prevents the thread coils falling off the bead-free lower edge of the thread storage drum even in the event of a thread breakage in the thread travel direction behind the thread storage drum. The same effect occurs with extremely low-elongation yarns and threads having flexibility which is sufficient for a stitch formation on a knitting or weaving machine.

Advantageously, the conicity ratio between the shallower thread run-on region and the steeper thread run-in region of the storage drum is about 10:1 and the apical angle of the frustoconical run-in region is about 14° .

Preferably the thread storage drum has a smooth closed outer surface area. A known drum with a rough outer surface in the region of the cylindrical thread storage region can possibly be of advantage in the case of completely unelastic smooth plastics threads having reduced flexibility. However these are no longer used for knitted and woven fabrics.

An exemplified embodiment of a thread delivery device in accordance with the invention will be described in more detail hereinunder with reference to the accompanying drawings, in which:

Fig. 1 is a schematic side view of a thread delivery device;

Fig. 2 is a side view of only the thread storage drum of the thread delivery device of Fig. 1 to an enlarged scale; and

Fig. 3 is an axial view of the thread storage drum of Fig. 2.

The thread delivery device shown in Fig. 1 includes a housing 10 which is designed as a hollow body and which is releasably fastened at one side to a mounting rail 11 of a textile machine. A thread storage drum 17 which will be described in more detail in connection with Figs. 2 and 3 is disposed beneath the housing 10. The thread storage drum 17 is connected securely to a shaft 18, which extends vertically through the housing 10 and is mounted in the housing 10. Mounted on that part of the shaft 18 which projects beyond the upper side of the housing 10 are two belt pulleys 19 and 20, which can be selectively coupled with the shaft 18 by means of an axially adjustable coupling disc 21 arranged therebetween.

Frontally a thread brake 23 is arranged at the other side 22 of the housing 10 and disposed above the thread brake 23 is a first thread guiding eye 24 which is connected securely to the housing 10. Mounted on the underside of the housing 10, in front of the thread storage drum 17 in the thread passage direction, is a thread feed guiding eyelet 25, and arranged one behind the other behind the thread storage drum 17 in the thread travel direction are two thread draw-off guiding elements 26 and 27, which bring about tangential draw-off of the thread 28 (shown by a dot-dash line) from the thread storage drum 17. Incorporated into the housing 10 of the thread delivery device are known thread monitoring mechanisms, namely an unravelling and/or thread-breakage monitoring mechanism,

which controls the thread in front of the thread storage drum 17 by means of a yoke-like sensor or feeler 29 which butts against the thread, and a thread-breakage monitoring mechanism, which is arranged behind the thread storage drum 17 in the thread passage direction and has a yoke-like sensor or feeler 30 which rests on the thread 28 between the two thread draw-off guiding elements 26 and 27. The sensors 29 and 30 are shown by broken lines in positions in which they effect a switch-off of a textile machine and of a driving device for the thread storage drum 17 on account of thread breakage or thread tension being too great.

The thread storage drum 17 which is shown by itself in Figs. 2 and 3, has an upper edge disc 31. Connecting downwardly to this edge disc 31 is a shallow frustoconical thread reception or run-on region 32 for the thread 28 emerging from the thread-feed guiding eyelet 25. In the illustrated embodiment the outer surface of this conical thread run-on region 32 forms an angle of 75° with the vertical, i.e. has a half cone apex angle of 75° . Connecting to the thread run-on region 32, which is relatively short in the axial direction, is a steeper frustoconical thread run-in region 33 which is somewhat longer in the axial direction and which merges into a longer substantially cylindrical thread storage region 35 culminating in a bead-free lower drum edge 35. The transition from the frustoconical thread run-in region 33 into the cylindrical thread storage region 34 may be curved in design, in other words without a circumferential break line. In the illustrated embodiment, the thread storage region 34 tapers slightly in the direction of the bead-free lower drum edge 35 with a conicity of less than $1/4^\circ$ (angle γ). The steep frustoconical thread run-in region 33, in the illustrated embodiment, forms an angle β of 7° with the vertical, i.e. possesses a cone apex angle of 14° .

The position of the thread-feed guide eyelet 25 in the direction of the axis of rotation 36 of the thread storage drum 17 and in its spacing from this axis is so selected that the thread 28 is directed onto the thread run-on region 32 of the thread storage drum 17 from obliquely above and at a shallow angle and touches it for the first time approximately at the location 37, shown in Figs. 2 and 3. After only a short distance the thread 28 moves over, at location 38 onto the steeper thread run-in region 33, on which the thread 28 unwinds in spaced-apart coils 39 which continue in fairly close succession over the subsequent thread storage region 34. The thread draw-off guiding element 26 is, in its position in the axial direction and in its distance from the axis of rotation 36, so arranged that the thread 28 is drawn off through it from above the lower bead-free drum edge 35. The thread 28 is also drawn off tangentially from the outer surface of the thread storage region 35 and at an angle to the plane formed by the last complete thread coil 39.

The thread-feed guide eyelet 25 can be designed so as to be adjustable in height in the axial direction of the thread storage drum 17 within a region which ensures that the thread 28 in each case first contacts the thread storage drum in the thread run-on region

32, but with a varied abutment point 37. Also the two thread draw-off guiding elements 26 and 27 can be designed so as to be adjustable in height to vary the draw-off angle δ .

5

CLAIMS

1. A thread delivery device for textile machinery comprising a drivable thread storage drum which is mounted rotatably on a substantially vertical axis and which has, in its upper part, a frustoconical thread run-in region and a cylindrical thread storage region linking downwardly thereto, characterised in that a shallower frustoconical thread run-on or reception region is formed above the frustoconical thread run-in region, in that the cylindrical thread storage region ends in a bead-free lower drum edge, in that a thread-feed guiding element (25) is so arranged that the thread is brought obliquely from above and tangentially onto the thread run-on region, and in that a thread draw-off guiding element enabling a tangential thread draw-off is so arranged that the thread is lifted off from the cylindrical thread storage region above the bead-free lower drum edge at a shallow angle to a plane determined by the lowermost complete thread coil.

2. A thread delivery device as claimed in claim 1, characterised in that the conicity and length of the frustoconical thread run-in region in relation to the diameter of the subsequent cylindrical thread storage region of the thread storage drum are so selected that the thread, upon run-off over the

downwardly-tapering thread run-in region can experience a length shrinkage of 2% at the most.

3. A thread delivery device as claimed in claim 1 or 2, characterised in that the conicity ratio between the shallower thread run-on or reception region and the steeper thread run-in region of the thread storage drum amounts to about 10:1.

4. A thread delivery device as claimed in claim 1, 2 or 3, characterised in that the apical angle of the frustoconical thread run-in region amounts to 14° .

5. A thread delivery device as claimed in any preceding claim, characterised in that the thread storage region tapers slightly from the frustoconical thread run-in region towards the bead-free lower edge of the thread storage drum.

6. A thread delivery device as claimed in claim 5, characterised in that the tapering is effected uniformly with a conicity of less than $1/4^\circ$.

7. A thread delivery device as claimed in any preceding claim, characterised in that the thread storage drum has a closed outer surface area.

8. A thread delivery device as claimed in any preceding claim, characterised in that the thread-feed guiding element and/or the thread draw-off guiding element are arranged so as to be adjustable in height in a limited region with respect to the thread storage drum.

9. A thread delivery device for textile machinery substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.